

March 4, 2026

Release Notes for the DPR Level-2 and Level-3 products

<Major changes in the DPR Level-2 from Version 07C to Version 08A>

1. The product format was updated from HDF5 to NetCDF.
2. The adjustment factors has been introduced to compensate for small temporal change in calibration factor of sensors for providing reliable data record of precipitation radar observations (Kanemaru et al. 2024). For PR and KaPR, temporal adjustment has been implemented since Version 05. For KuPR, temporal adjustment is also implemented in Version 08 because we found that small change of the KuPR's calibration. Therefore, we can provide reliable data record of the KuPR and DPR products, expect for quality change due to the change in the height of GPM Core Observatory conducted in November 2023.
3. Updates of binClutterFreeBottom are made in the Ku-band and dual-frequency PRE modules (but not in the Ka-band PRE module). In particular, in the DPR PRE module, the determination of binClutterFreeBottom is made by a new method using the dual-frequency ratio of received powers (DFRP) proposed by Shimizu et al. (2023).
4. hydroClass identifying hydrometeor type is newly implemented in the dual-frequency CSF module.
5. The content of typePrecip (CSF) is slightly changed in V08A, but its basic rule remains so that the main type of precipitation can be extracted from the most significant digit of typePrecip, which is expressed by an 8 digit number.
6. Improved PIAhybrid in the SRT module.
7. Introduction of a new surface precipitation estimate (precipRateESurface) in the SLV module, based on the surface precipitation profile database developed by Hirose et al. (2021).
8. Addition of a new constraint to the dual-frequency algorithm in the SLV module, utilizing PIAhybrid.
9. Several variables were changed as listed below.
 - hydroClass was newly added to the STD product.
 - binHeavyIcePrecipBottom, binHeavyIcePrecipTop, and nHeavyIcePrecip were newly added to the STD product (DPR/HS).
 - rangeBinSizeL1 was newly added to the STD product.
 - height was changed from 32-bit floating-point type to 16-bit signed integer.
 - flagHeavyIcePrecip was changed from 8-bit signed integers to 8-bit unsigned integers.
 - airTemperature was moved from the STD product to the ENV product.



March 4, 2026

- precipRateESurface2 and precipRateESurface2Status were removed from the STD product.

More detailed information is provided in the subsequent sections and/or in the DPR Level-2 ATBD available at the link below.

https://www.eorc.jaxa.jp/GPM/doc/algorithm/ATBD_DPR_L2.pdf

CAVEATS for DPR Level-2 V08A:

1. The unit of precipWater was incorrectly set to kg/m³. The correct unit is g/m³.

<Major changes in the DPR Level-3 from Version 07D to Version 08A>

1. The product format was updated from HDF5 to NetCDF.
2. Several variables were changed as listed below.
 - precipRateESurface2 in the 3DPR product and precipRateESurface2Mean in 3DPRD were removed.



March 4, 2026

<Minor changes in the DPR Level-3 products from Version 07C to Version 07D>

The daily and monthly Level-3 DPR algorithms (3DPR) have been updated to correct an error in the collection of Level-2 precipitation statistics partitioned by local time. This correction is only being made on forward data starting with Sept. 1, 2024. Prior data products contain corrupted information on the number of observations partitioned by local time. The fields impacted are: observationCounts/localTime and precipRatelocalTime/* for all grids and swaths. The issue will be corrected for past products during the Version 08 reprocessing.

<Minor changes in the DPR Level-2 products from Version 07B to Version 07C>

The GPM Core Observatory satellite performed orbit boost maneuvers on Nov. 7 and 8, 2023 that raised its altitude from 407km to 442km. Details show at the following link.

<https://gpm.nasa.gov/missions/gpm/orbit-boost>

The orbits in which this operation was performed are shown operation status in the following link.

<https://gportal.jaxa.jp/gpr/information/product>

In Version 07C, the sensitivity, the spatial resolution and the swath width in the DPR instrument were changed. See full descriptions by the following link.

<https://www.eorc.jaxa.jp/GPM/en/boost.html>

The updates of the DPR Level 2 algorithm are shown in detail in the following link.

https://www.eorc.jaxa.jp/GPM/doc/algorithm/GPM_Orbit-boost_DPR-note_20240304A.pdf

<Major changes in the DPR Level-2 from Version 07A to Version 07B>

In Version 07B, a new NOAA/NESDIS autosnow was introduced as the input to the DPR Level-2 algorithm. A comparison of precipitation estimates between old and new versions of the autosnow shows that there were differences in specific cases, but few in number. The monthly surface precipitation rate over areas where the snow cover indexes were changed in V07B was very close to that of V07A with the difference less than 1 %.

<Major changes in the DPR Level-2 from Version 06A to Version 07A>

Version 07A is the first standard product to account for the Ka-band Precipitation Radar (KaPR) scan pattern change implemented on May 21, 2018. This change in scan pattern allows for a more

March 4, 2026

accurate precipitation estimation method for dual frequency radar, Ku-band and Ka-band Precipitation radar (KuPR and KaPR), to be applied to the entire observation swath. On the other hand, this led to significant changes of DPR file specifications for common file structures before and after the scan change, in addition to algorithm evolutions. See full descriptions at the following websites:

<https://arthurhou.pps.eosdis.nasa.gov/atbd.html>

<https://www.eorc.jaxa.jp/GPM/en/archives.html>

1. Format change in the product

In the V06X (experimental product), a new format was implemented including “FS” which is defined as the full swath dual-frequency product with 125 m range resolution. In the V07A, this FS format is applied to data taken both before and after the scan pattern change of the KaPR in May 2018 (Figure 1). Note that the DPR/FS has KuPR single frequency data in the outer swath before the scan pattern change, whereas it has DPR dual frequency data in the outer swath after the scan pattern change.

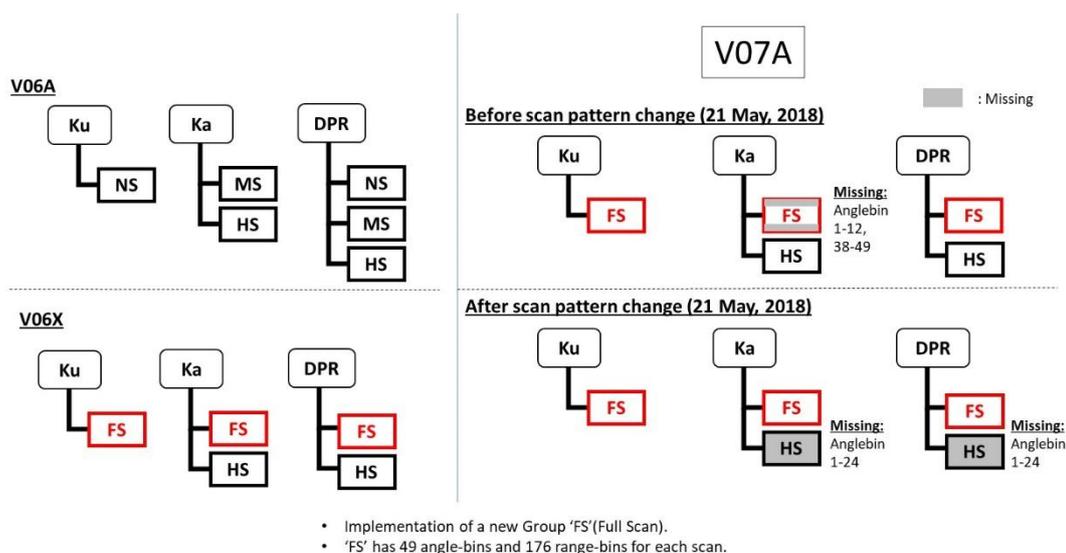


Figure 1. Changes of File structure from V06 to V07

2. In the version 07, the improved sidelobe clutter removal routine was implemented for the single frequency (KuPR, KaPR, and PR) Level-2 algorithms based on the results of Kanemaru et al. (2020, 2021). In addition, a new 3-D precipitation judgement method is implemented to improve the detectability of precipitation signals. This method uses signals not only in the vertical direction but also in cross-track and along-track directions. This method is expected to improve the detection of weak, horizontally distributed precipitation that often occurs at high-latitudes. See the ATBD for full descriptions.

March 4, 2026

3. "flagHail" is newly implemented in the CSF. (Dual frequency only.)
4. The following new items are added to present information about flagHeavyIcePrecip in the CSF: binHeavyIcePrecipTop, binHeavyIcePrecipBottom, and nHeavyIcePrecip.
5. Variables of the Trigger module (TRG) are newly implemented in V07.
6. Changes in the DSD/Solver module from V06 to V07 are listed as follows.
 - A) Revision of the relationship between precipitation rate R and volume-weighted mean drop size D_m (the so-called R - D_m relationship). In addition, the parameter ϵ in the R - D_m relationship, which is independent of range in V06, is allowed to vary with range in V07.
 - B) Revision of DSD database (used for single-frequency).
 - C) Soil moisture effect.

Note that the soil moisture effect is expected to increase the precipitation amount over land as estimated by the single frequency algorithms by about 14-23%.
7. "precipRateESurface2" is a surface precipitation estimate based on the *a priori* low-level precipitation profiles (Hirose et al., 2021,). This estimate is stored as an Experimental variable.
8. Other changes in DPR Level-2 algorithm:
 - "binMirrorImageL2" is newly implemented in the Preparation module (PRE) to notify a false precipitation echo that appears at high altitude due to the mirror image.
 - Adjustment factor for KaPR's σ^0 and Z-factor is updated in the Preparation module (PRE).
 - The VER module includes new variables such as the profile of air temperature, a flag that indicates an inversion layer of air temperature, and the rain-free path-integrated attenuation estimate piaNP.
 - Several variable names are changed.
 - zFactorCorrected → zFactorFinal
 - zFactorCorrectedESurface → zFactorFinalESurface
 - zFactorCorrectedNearSurface → zFactorFinalNearSurface
 - Bugs are fixed in several modules. Details of the description for variables are described in Appendix or in the following websites:

<https://www.eorc.jaxa.jp/GPM/en/archives.html>

<https://arthurhou.pps.eosdis.nasa.gov/GPMprelimdocs.html>

CAVEATS for DPR Level-2 V07A:

PRE module

1. In the DPR/FS and KaPR/FS, the following variables have unexpected values only in angle bins 1-12 of the first scan of the granule without any quality indications by the quality flags. This issue occurred only in orbits after the scan pattern change.
 - attenuationNP, piaNP, piaNPrainFree, sigmaZeroNPCorrected, and sigmaZeroCorrected.

March 4, 2026

CSF module

1. There are bugs on Heavy Ice Precipitation (HIP). The bugs appear only in the data before the antenna scan pattern change (viz., before May 21, 2018). Since the occurrence of HIP is not frequent, the effect of the bugs on the rainfall rate statistics would be small.

A) `flagHeavyIcePrecip` in DPR FS does not reflect the Ka-band detection of HIP and the flag value is different from what is designed. The result is based on HIP detected by Ku-band and/or DFRm methods only. Nevertheless, a positive flag value indicates that HIP is detected.

On the other hand, the additional HIP flags

`binHeavyIcePrecipTop`

`binHeavyIcePrecipBottom`

`nHeavyIcePrecip`

in the DPR FS structure contain correct values in the inner swath. These flags consist of two dimensional arrays in the DPR FS structure and the second array index distinguishes values obtained by the Ku, Ka, and DFRm methods. In the outer swath, however, `binHeavyIcePrecipTop` and `binHeavyIcePrecipBottom` for Ka-band should contain Missing values, but the bugs make them contain values copied from Ku-band. As for the DPR HIP data before May 21, 2018, our suggestion is that users should examine whether `flagHeavyIcePrecip > 0` or not. Examination of `nHeavyIcePrecip` would be a good idea.

B) In the HS mode data, the additional HIP flags, i.e.,

`binHeavyIcePrecipTop`, `binHeavyIcePrecipBottom`, and `nHeavyIcePrecip`

do not contain expected values. The values of those for the Ka-band single frequency HS data are always zero, and those items are even non-existent in the dual frequency DPR HS data structure, the latter of which might be a toolkit bug.

2. A bug on `binBBTop`: In the V07 DPR FS processing, `binBBTop` - `binBBPeak` in the outer swath is bounded by the same parameter value as that in the inner swath. Since the apparent width of BB increases in the outer swath because of the smearing of BB peak, a different parameter value should be used. This bug will be fixed in the next V08. Incidentally, there is not such a bug in the Ku-band single frequency FS processing. The bug was introduced when transplanting the Ku-band FS processing code to the DPR FS processing code. The effect of the bug on the rainfall rate statistics is estimated to be very small.

<Major changes in the DPR Level-3 from Version 06A to Version 07A>

1. Format changes in Level-3 DPR Daily/Monthly Products

For a full description of these changes see the Level-3 DPR V07 ATBD document. To accommodate the change in the FS/HS/MS swath structures in the Level-2 products, the Level-3 grids have been restructured as below.

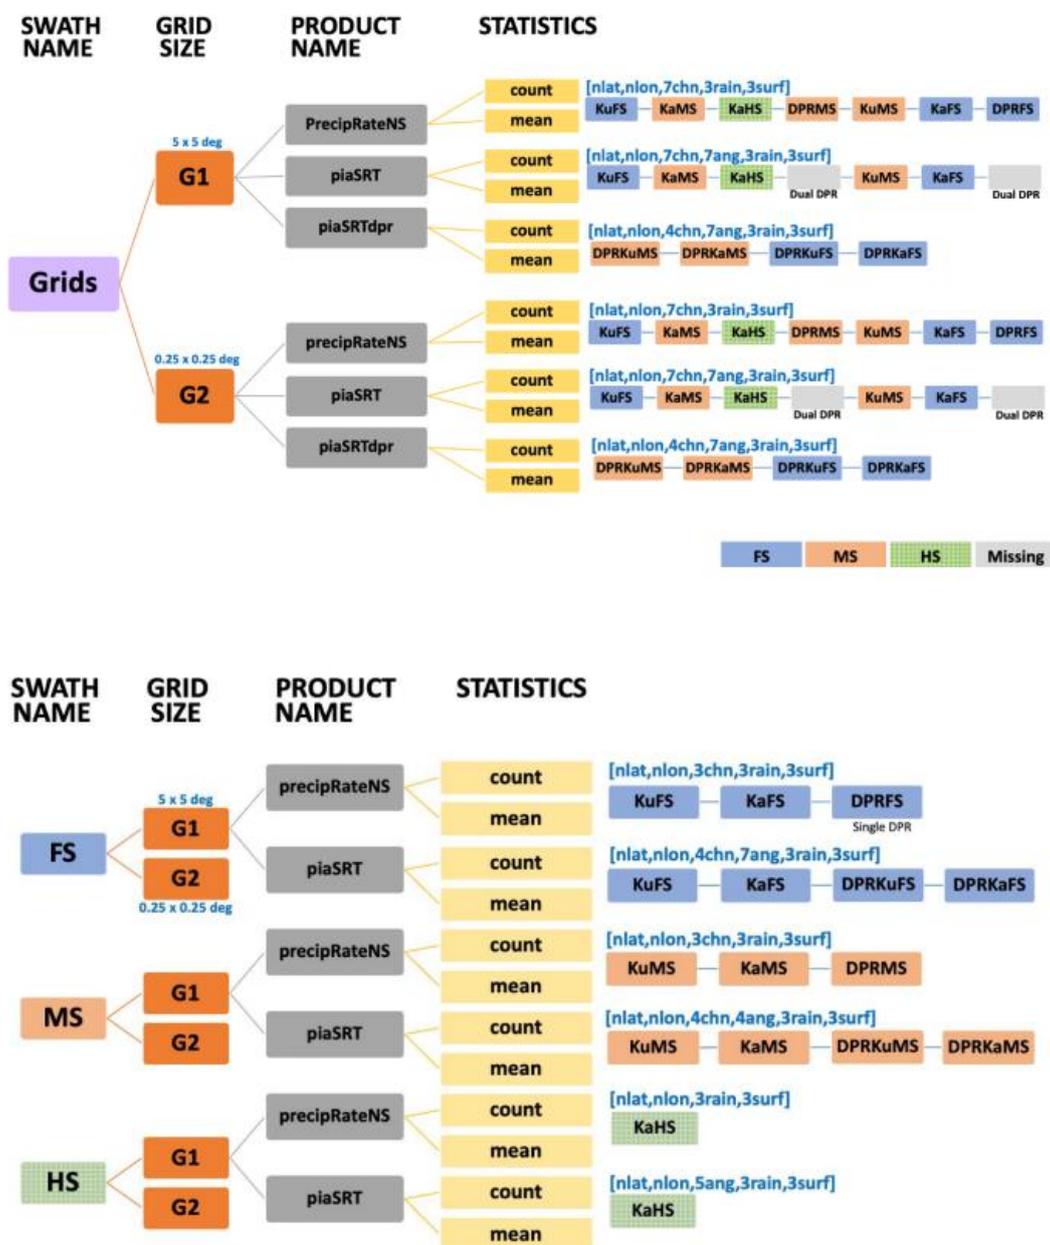


Figure 2. The organization for Level-3 in V06X (upper) and V07A (lower)



March 4, 2026

CAVEAT for DPR Level-3 V07A:

The Version 07 Level-3 daily products 3DPR-ASC and 3DPR-DES do not accumulate FS statistics (full 49 ifov data) from 5/21/2018 to 5/28/2018 even though the Ka scanning pattern change occurred on 5/21/2018. This will be corrected in a later product version. Users should note that monthly statistics of the Ka and DPR FS/HS data do not cover the entire month of May, 2018.

CAVEAT for DPR Level-3 V06A:

The DPR Daily Product (3DPRD) of Version 06A includes a minor bug. In the array of KuPR channel for ascending path, stratPrecipRateNearSurfMean and stratPrecipRateESurfMean stores convective precipitation (they should have stored stratiform precipitation). This issue is fixed in Version 07A.



March 4, 2026

<Major changes in the DPR Level-2 from Version 05B to Version 06A>

1. A new SRT code has been modified to include calculations of Hirschfeld-Bordan PIA as well as a hybrid PIA that combines HB and SRT results. As a result of applying the new PIA in SLV module, erroneously large estimates of high precipitation over ocean (near coast) are mitigated and both DPR (MS) and Ku rain estimates in V06A agree better with Ground Validation data over USA.
2. A new classification algorithm is introduced by the University of Washington (Stacy Brodzik & Robert Houze) to reclassify the stratiform rain type. The new algorithm improved an angle-bin dependence of rain classification and SLH profiles.

Minor changes in DPR Level-2 algorithm:

- Mitigated KaHS's sidelobe clutter and re-calculated the data base for KuPR's sidelobe clutter.
- New variables are introduced. They are flagScanPatten in PRE module, PIAhb, PIAhybrid, reliabFactorHY, reliabFlagHY, stddevEff, stddevHY and zeta in SRT module. For definitions of these variables, the reader is referred to the user manual.
- Modification of surface snow index for the winter temperature inversions.
- Applied the latest SRT data base.
- Bug fix of flagEcho in dual frequency data processing.



March 4, 2026

<Major changes in the DPR Level-3 products from Version 05B to Version 06A>

1. New variables are introduced. They are zFactorMeasuredNearSurface, DFRNearSurface, DFRmNearSurface, piaHybrid, piaHybridDPR, piaHB, zeta, and flagHeavyIcePrecip. The definitions of these variables can be found in the user manual.

<Major changes in the DPR Level-2 products from Version 05A to Version 05B>

Figure 3 shows DPR's scan patterns before May 21 2018 (left) and after May 21 2018 (right). KaHS beams scan in the inner swath before May 21 2018, but now they scan in the outer swath and match with KuPR's beams. Numbers in color indicate angle bin numbers for KuPR (blue), KaMS (yellow), and KaHS (red).

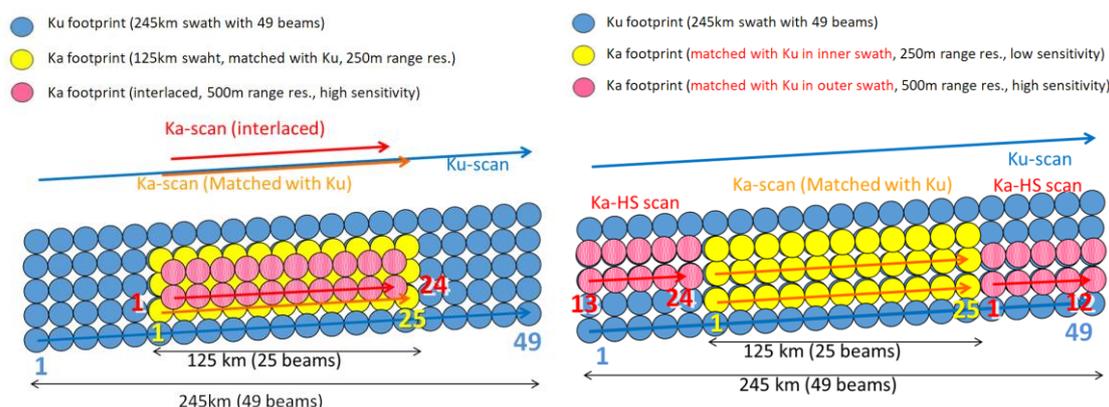


Figure 3. DPR's scan patterns before and after May 21 2018.

- As of May 21, 2018, the scan pattern of KaHS beams was changed as shown in Figure 3. The KaHS beams scanned in the inner swath before May 21 2018, but now they scan in the outer swath and match with KuPR's beams. Please note that the range resolution of KaHS is 500m and differs from that of the KuPR or KaMS. One scan of KuPR over the full swath consists of 49 beams which are numbered from 1 to 49 in Figure 3 below. The array for one scan of KaMS data consists of 25 beams which correspond to KuPR's central beams from 13 to 37, whereas one scan of KaHS data array for 24 beams consists of two parts. The first 12 elements in the array correspond to KuPR's beams from 38 to 49, and the last 12 elements correspond to KuPR's beams from 1 to 12 of the following scan. All KaMS beams and the first 12 KaHS beams match well with KuPR's beams from 13 to 49. The magnitude of misalignment between these KuPR and KaPR beams is estimated to be less than 50 m after May 21. However, KaHS's beams from 13 to 24 are slightly shifted from the corresponding KuPR beams from 1 to 12 in the along-track direction. The magnitude of misalignment in these beams is about 400 m.

The dual-frequency algorithm can be applied to the full swath of data after the change of scan pattern. However, because it takes time to develop a new algorithm applicable to the full swath and to adjust the necessary parameters to ensure the quality of the products, KaHS data are not processed in V05B Level-2 algorithm. Missing values are stored in the output variables that use KaHS data. KaHS's received power data are available only in Level-1 products in V05B.



March 4, 2026

2. All beam directions of KuPR and KaPR were adjusted to match better with the nominal footprint locations. The difference between KuPR and KaPR's footprint centers is now about 30 m at nadir. It was about 300 m before May 21, 2018. This improvement of beam matching is not considered to make a big difference in the Level-2 output products except for very heavy rain cases because the mismatch was small (300 m) from the beginning.



March 4, 2026

<Major changes in the DPR Level-2 products from Version 04A to Version 05A>

All users of DPR Level-2 data should keep in mind the following changes in V5 products.

This document describes only the major changes in the Level-2 products. There are some changes in Level-1 that affect the Level-2 products. Please refer to “Release Notes for the DPR Level-1 products” for the details of the changes in Level-1 products.

Among several changes in Level-1 products, the important changes that affect Level-2 products substantially are the following points.

The DPR’s system parameters were re-examined. Based on the new calibration results, the offset parameters for the transmitting powers, receiver’s gains, the beam widths, and the pulse width of both KuPR and KaPR are redefined. As a result, Z_m of KuPR has increased by about +1.3 dB, and Z_m of KaPR by about +1.2 dB. The radar surface cross section (σ^0) of KuPR has increased by about +1.2 dB and that of KaPR by about +1.1 dB, although the changes in σ^0 depend slightly on the incidence angle due to the changes in the beam widths. Because of the introduction of the adjustment factors in Level-2 (see below) whose magnitudes vary with time, the numbers mentioned above are not fixed numbers but change with time, especially near the beginning of the GPM mission. In fact, for example, statistics show that an average (over angle) increase in σ^0 at Ku-band is about +1.0 dB, that at KaMS is about +0.6 dB and that at KaHS is about +0.9 dB on the first 5 days in June 2014.

- The FCIF-LUT for the KuPR near the saturation was improved so that the effect of saturation near the saturation level was mitigated.

Changes in Level-2 algorithm:

- In addition to the changes in the DPR Level-1 calibration, adjustment factors are introduced to remove small trends in the overall system gains in KuPR and KaPR. The adjustment factors change the measured received powers only by a small fraction of dB.
- Since the FCIF-LUT for the KuPR near the saturation level was modified to mitigate the effect of saturation, the statistics of σ^0 near the saturation level in the KuPR has changed. This change affects the SRT performance as well. The side-lobe echo cancellation parameters are adjusted to cope with this change as well.
- Measured radar reflectivity factor Z_m and surface radar cross section σ^0 are calculated based on the new values of the pulse widths of both KuPR and KaPR. Accordingly, the angle bin dependence of σ^0 has changed slightly.
- A DSD database that depends on the month, region, surface type and rain type was created from the statistics of DSD parameters estimated with the dual-frequency algorithm. The R-



March 4, 2026

Dm relationship in the DSD database is used as the default R-Dm relationship in the single frequency (Ku-only and Ka-only) data processing before it is modified by other constraints such as the path-integrated attenuation. The introduction of the DSD database has modified the precipitation estimates substantially when they are light (less than about 3mm/h) in many cases. Rain estimates from the Ku-only and dual-frequency algorithms now agree very well.

- New flags are introduced: snowIceCover in the preparation module, flagHeavyIcePrecip and flagAnvil in the classification module, and flagSurfaceSnowfall and surfaceSnowfallIndex in the experimental module. The meanings of these flags should be referred to the user's manual.
- Winter convective storms that give large DFRm (measured Dual-Frequency Ratio) at the storm top are flagged and the corresponding pixels are classified as convective in V5. This category only appears in the inner swath since DFRm is available only there.



March 4, 2026

Reference

- Hirose, M., S. Shige, T. Kubota, F. A. Furuzawa, H. Minda, H. Masunaga, 2021: Refinement of surface precipitation estimates for the Dual-frequency Precipitation Radar on the GPM Core Observatory using near-nadir measurements. *Journal of the Meteorological Society of Japan. Ser. II*, 99(5), 1231-1252, <https://doi.org/10.2151/jmsj.2021-060>
- Kanemaru, K., T. Iguchi, T. Masaki, T. Kubota, 2020: Estimates of Spaceborne Precipitation Radar Pulsewidth and Beamwidth Using Sea Surface Echo Data, *IEEE Trans. Geosci. Remote Sens.*, 58(8), 5291–5303, doi:10.1109/TGRS.2019.2963090
- Kanemaru, K., H. Hanado, K. Nakagawa, 2021: Improvement of the clutter removal method for the spaceborne precipitation radars, the IEEE Geoscience and Remote Sensing Society, the International Geoscience and Remote Sensing Symposium 2021, Virtual Symposium
- Kanemaru, K., T. Iguchi, T. Masaki, N. Yoshida, and T. Kubota, 2024: Development of a Precipitation Climatology Record From Spaceborne Precipitation Radar Data. Part II: Temporal Adjustment of the Calibration Change Using the Ocean Normalized Radar Cross Section. *J. Atmos. Oceanic Tech.*, 41, 921-933, doi:10.1175/JTECH-D-23-0054.1.
- Shimizu, R., S. Shige, T. Iguchi, C.-K. Yu, and L.-W. Cheng, 2023: Narrowing the Blind Zone of the GPM Dual-Frequency Precipitation Radar to Improve Shallow Precipitation Detection in Mountainous Areas, *J. Appl. Meteor. Climatol.*, 62, 1437—1450, doi: 10.1175/JAMC-D-22-0162.1.